



Technical Data Sheet

PAVER-SAFE

Safety Backing Sheet for Pavers

COMPONENTS

PAVER-SAFE is composed of:
1xRoll

CHARACTERISTICS

Width: 590mm


Thickness: 1.5mm

Length: 18m

Unit area mass: 1508g/m²

Soft Body Impact Test (EN 12825:2003): Pass

Hard Body Impact Test (EN 12825:2003): Pass

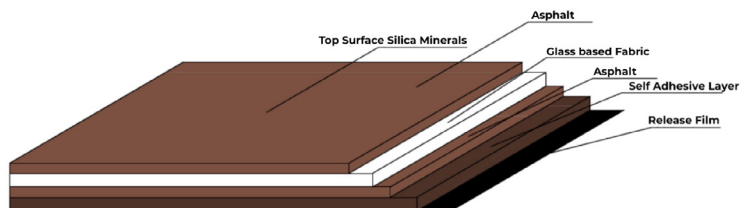

MATERIAL

Layers of silica minerals, asphalt, glass base fabric & self-adhesive asphalt

Reverse side has a removable protective film

Designed and manufactured in Japan

Storage temperature range: 0C° to 35C°

Do not store in direct sunlight

Do not install in temperatures below 0C°

APPLICATIONS

PAVER-SAFE is designed for application to the underside of 20mm porcelain tiles to ensure that individual tiles are safely held together in the event of fracture or breakage of the tile. It is designed as temporary protection for pedestrian traffic only, and once the tile has broken it should not be walked on until it is replaced.

Suitable for tiles that are 60cm wide, PAVER-SAFE can be cut to size to accommodate different lengths of tiles. The product is self-adhesive and easy to apply with a pressure roller.

PRODUCT COVERAGE

600x600mm tile: 30 per roll

600x1200mm tile: 15 per roll

PACKAGING

In rolls, paper wrapped


Size: 0.59mx18m

Weight: 18kg (+/- 0.5kg)

Pallet: 50 rolls (2 layers of 25 rolls)

Pallet weight: 976kg

Pallet dimensions: 1060x1260x1345mm

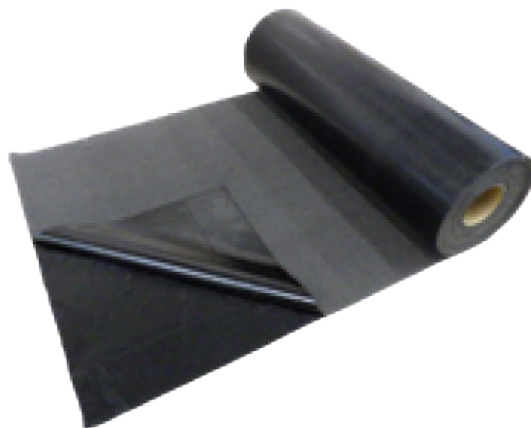

SAFETY INSTRUCTIONS

Buzon pedestals and accessories are designed to support external raised floors for pedestrian traffic only and are not designed to support or be subjected to moving and/or vibrating machinery & equipment, including maintenance, cleaning vehicles, automobiles and other similar equipment.

Contact us if you require further technical support or advice
buzonuk.com - info@buzonuk.com - +44 (0)20 8614 0874

Buzon has a policy of continuous improvement and reserves the right to modify, revise or change the above specifications without notice. This brochure is for descriptive purpose only and is based on the product as on the date of publication of this information.